

FORM PTO-1390 (Modified)
(REV 11-2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371**

12048-0002

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

10/031934

INTERNATIONAL APPLICATION NO.
PCT/AU00/00894

INTERNATIONAL FILING DATE
26 July 2000 (26.07.00)

PRIORITY DATE CLAIMED
28 July 1999 (28.07.99)

TITLE OF INVENTION

RETROFITTING VESSELS TO DEFLECT RADAR SIGNALS

APPLICANT(S) FOR DO/EO/US

Philip K. STAFFORD

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☒ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☐ is attached hereto.
 - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).
11. ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☐ A copy of the International Search Report (PCT/ISA/210).

Items 13 to 20 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
20. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
21. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
22. ☐ Certificate of Mailing by Express Mail
23. ☐ Other items or information:

3013 Rec'd PCT/PTO 25 JAN 2002

| U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.101) 10/031934 | | INTERNATIONAL APPLICATION NO. PCT/AU00/00894 | | ATTORNEY'S DOCKET NUMBER 12048-0002 | | | | | | | | | | | | | | | | | |
|---|--------------|--|-----------|---|--------------|--------------|------|--------------|-----------|---|-----------|--------------------|---------|---|-----------|--|--|--|--|-----------------|--|
| 24. The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) : <input checked="" type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1040.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$890.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$740.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$710.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00 ENTER APPROPRIATE BASIC FEE AMOUNT = | | | | CALCULATIONS PTO USE ONLY | | | | | | | | | | | | | | | | | |
| Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input checked="" type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (e)). | | | | \$1,040.00 | | | | | | | | | | | | | | | | | |
| <table border="1" style="width:100%; border-collapse: collapse;"><thead><tr><th style="width:15%;">CLAIMS</th><th style="width:20%;">NUMBER FILED</th><th style="width:20%;">NUMBER EXTRA</th><th style="width:15%;">RATE</th></tr></thead><tbody><tr><td>Total claims</td><td style="text-align: center;">26 - 20 =</td><td style="text-align: center;">6</td><td>x \$18.00</td></tr><tr><td>Independent claims</td><td style="text-align: center;">1 - 3 =</td><td style="text-align: center;">0</td><td>x \$84.00</td></tr><tr><td colspan="4">Multiple Dependent Claims (check if applicable) <input type="checkbox"/></td></tr></tbody></table> | | | | CLAIMS | NUMBER FILED | NUMBER EXTRA | RATE | Total claims | 26 - 20 = | 6 | x \$18.00 | Independent claims | 1 - 3 = | 0 | x \$84.00 | Multiple Dependent Claims (check if applicable) <input type="checkbox"/> | | | | \$108.00 | |
| CLAIMS | NUMBER FILED | NUMBER EXTRA | RATE | | | | | | | | | | | | | | | | | | |
| Total claims | 26 - 20 = | 6 | x \$18.00 | | | | | | | | | | | | | | | | | | |
| Independent claims | 1 - 3 = | 0 | x \$84.00 | | | | | | | | | | | | | | | | | | |
| Multiple Dependent Claims (check if applicable) <input type="checkbox"/> | | | | | | | | | | | | | | | | | | | | | |
| TOTAL OF ABOVE CALCULATIONS = | | | | \$130.00 | | | | | | | | | | | | | | | | | |
| <input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2. | | | | \$0.00 | | | | | | | | | | | | | | | | | |
| SUBTOTAL = | | | | \$1,278.00 | | | | | | | | | | | | | | | | | |
| Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (f)). | | | | \$0.00 | | | | | | | | | | | | | | | | | |
| TOTAL NATIONAL FEE = | | | | \$1,278.00 | | | | | | | | | | | | | | | | | |
| Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <input type="checkbox"/> | | | | \$0.00 | | | | | | | | | | | | | | | | | |
| TOTAL FEES ENCLOSED = | | | | \$1,278.00 | | | | | | | | | | | | | | | | | |
| | | | | Amount to be refunded | \$ | | | | | | | | | | | | | | | | |
| | | | | charged | \$ | | | | | | | | | | | | | | | | |
| <p>a. <input type="checkbox"/> A check in the amount of _____ to cover the above fees is enclosed.</p> <p>b. <input checked="" type="checkbox"/> Please charge my Deposit Account No. 50-1088 in the amount of \$1,278.00 to cover the above fees. A duplicate copy of this sheet is enclosed.</p> <p>c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 50-1088 A duplicate copy of this sheet is enclosed.</p> <p>d. <input type="checkbox"/> Fees are to be charged to a credit card. WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.</p> | | | | | | | | | | | | | | | | | | | | | |
| <p>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.</p> <p>SEND ALL CORRESPONDENCE TO:</p> <div style="border: 1px solid black; padding: 5px; width: 45%; float: left;"><p>Christopher W. Brody Clark & Brody 1750 K Street, NW, Suite 600 Washington, DC 20006</p><p>Telephone: 202-835-1111 Facsimile: 202-835-1755</p></div> <div style="float: right; width: 50%; text-align: center;"><p>SIGNATURE</p><p>Christopher W. Brody NAME</p><p>33,613 REGISTRATION NUMBER</p><p>January 25, 2002 DATE</p></div> <div style="clear: both;"></div> | | | | | | | | | | | | | | | | | | | | | |

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
U.S. Designated/Elected Office (DO/EO/US)

In re Application of:

STAFFORD

Int'l Serial No.: PCT/AU00/00894

Int'l Filing Date: 26 July 2000 (26.07.00)

For: Retrofitting Vessels to Deflect Radar Signals

PRELIMINARY AMENDMENT

Assistant Commissioner of Patents
Washington, D.C. 20231

Sir:

Prior to the calculation of the fees and issuance of the first official action, please amend the above-captioned application as follows:

IN THE CLAIMS:

3. (once amended) An array according to claim 1 wherein any edges defining the boundary of the reflective surfaces are oriented so as to be oblique to the direction of incident radar for a given range of incident directions.
4. (once amended) An array according to claim 1 wherein the reflective surfaces are oriented so as to reflect an incident radar signal by up to about 30 degrees.
5. (once amended) An array according to claim 1 wherein the reflective surfaces are oriented so as to reflect an incident radar signal by up to about 15 degrees.
6. (once amended) An array according to claim 1 wherein the reflective surfaces are oriented so as to reflect an incident radar signal by up to about 8 to 10 degrees.
7. (once amended) An array according to claim 1 wherein the element is triangular, polyhedral, pyramidal or prismatic in shape or in cross-section.
8. (once amended) An array according to claim 1 wherein the element is an elongated triangle, elongated polyhedron or elongated pyramid.

9. (once amended) An array according to claim 1 wherein the element defines an apex disposed in a region which is forward relative to the planar faces of the reflective surfaces and collinear with respect to the incident radar signal.

10. (once amended) An array according to claim 1 wherein the array comprises a plurality of uniform elements.

12. (once amended) An array according to claim 1 formed from a lightweight material.

13. (once amended) An array according to claim 1 wherein the elements are perforated.

14. (once amended) An array according to claim 1, wherein the array is formed from a mesh material.

15. (once amended) An array according to claim 1, wherein said array is in roll or sheer form.

17. (once amended) An array according to claim 1 wherein the elements have a thickness in the range of from about 0.25mm to 15mm.

19. (once amended) A vessel have a structure to which is attached at least one array as claimed in claim 1.

20. (once amended) A method of retrofitting an array to a vessel to reduce its radar signature, the array being as claimed in claim 1, the method including the step of attaching to surfaces of the vessel structure the array wherein the arrangement when attached to surfaces of the vessel structure results in the faces being oriented so as to reflect an incident radar signal in a direction away from its direction of incidence for a given range of incident directions.

22. (once amended) A method according to claim 20, wherein the vessel structure comprises any surface on the structure capable of reflecting a radar signal.

23. (once amended) A method according to claim 20, wherein the arrangement of elements on the vessel structure is such that the facets of the elements reflect the incident radar signal away from a threat direction.

24. (once amended) A method according to claim 20, wherein the array comprises a plurality of sheets capable of being joined together.

25. (once amended) A method for retrofitting an array to a vessel to reduce its radar signature, the array being as claimed in claim 1, the method including the step of fastening to surfaces of the vessel structure in sheet form one or more arrays comprising a plurality of uniformly shaped elements being triangular, polyhedral, pyramidal or prismatic in shape and having edges defining the boundary of the reflective surfaces being such that the faces and the edges are oblique to the direction of incident radar for a given range of incident directions, the arrangement being such that when fastened to surfaces of the vessel structure the reflective surfaces are oriented so as to reflect an incident radar signal by up to about 30 degrees away from its direction of incidence for a given range of incident directions.

26. (once amended) A retrofitted vessel made by the method of claim 20.


REMARKS

The above amendments are made to delete multiple dependency in the claims. No new matter is contained in the amendment.

Please charge any fee deficiency or credit any overpayment to Deposit Account No. 50-1088.

Respectfully submitted,

CLARK & BRODY

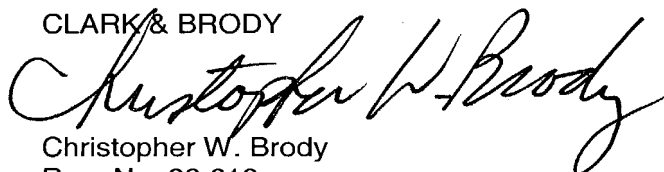

Christopher W. Brody
Reg. No. 33,613

1750 K Street, NW, Suite 600
Washington, DC 20006
Telephone: 202-835-1111
Docket No.: 12048-0002
Date: January 25, 2002

MARKED-UP CLAIMS

3. An array according to [either] claim 1 [or 2] wherein any edges defining the boundary of the reflective surfaces are oriented so as to be oblique to the direction of incident radar for a given range of incident directions.
4. An array according to [any one of claims 1 to 3] claim 1 wherein the reflective surfaces are oriented so as to reflect an incident radar signal by up to about 30 degrees.
5. An array according to [any one of claims 1 to 3] claim 1 wherein the reflective surfaces are oriented so as to reflect an incident radar signal by up to about 15 degrees.
6. An array according to [any one of claims 1 to 5] claim 1 wherein the reflective surfaces are oriented so as to reflect an incident radar signal by up to about 8 to 10 degrees.
7. An array according to [any one of claims 1 to 6] claim 1 wherein the element is triangular, polyhedral, pyramidal or prismatic in shape or in cross-section.
8. An array according to [any one of claims 1 to 6] claim 1 wherein the element is an elongated triangle, elongated polyhedron or elongated pyramid.
9. An array according to [any one of claims 1 to 8] claim 1 wherein the element defines an apex disposed in a region which is forward relative to the planar faces of the reflective surfaces and collinear with respect to the incident radar signal.
10. An array according to [any one of claims 1 to 9] claim 1 wherein the array comprises a plurality of uniform elements.
12. An array according to [any one of claims 1 to 11] claim 1 formed from a lightweight material.
13. An array according to [any one of claims 1 to 12] claim 1 wherein the elements are perforated.
14. An array according to [any one of claims 1 to 13] claim 1, wherein the array is formed from a mesh material.
15. An array according to [any one of claims 1 to 14] claim 1, wherein said array is in roll or sheer form.
17. An array according to [any one of claims 1 to 15] claim 1 wherein the elements have a thickness in the range of from about 0.25mm to 15mm.
19. A vessel have a structure to which is attached at least one array as claimed in claim 1 [any preceding claim].
20. A method of retrofitting an array to a vessel to reduce its radar signature, the array being as claimed in [any one of claims 1 to 18] claim 1, the method including the step of attaching to surfaces of the vessel structure the array wherein the arrangement when attached to surfaces of the vessel structure results in the faces being oriented so as to reflect an incident radar signal in a direction away from its direction of incidence for a given range of incident directions.

22. A method according to claim 20 [or 21], wherein the vessel structure comprises any surface on the structure capable of reflecting a radar signal.

23. A method according to [any one of claims 20 to 22] claim 20, wherein the arrangement of elements on the vessel structure is such that the facets of the elements reflect the incident radar signal away from a threat direction.

24. A method according to [any one of claims 20 to 23] claim 20, wherein the array comprises a plurality of sheets capable of being joined together.

25. A method for retrofitting an array to a vessel to reduce its radar signature, the array being as claimed [in any one of claims 1 to 18] claim 1, the method including the step of fastening to surfaces of the vessel structure in sheet form one or more arrays comprising a plurality of uniformly shaped elements being triangular, polyhedral, pyramidal or prismatic in shape and having edges defining the boundary of the reflective surfaces being such that the faces and the edges are oblique to the direction of incident radar for a given range of incident directions, the arrangement being such that when fastened to surfaces of the vessel structure the reflective surfaces are oriented so as to reflect an incident radar signal by up to about 30 degrees away from its direction of incidence for a given range of incident directions.

26. A retrofitted vessel [retrofitted according to] made by the method [of any one of claims 20 to 25] of claim 20.

RETROFITTING VESSELS TO DEFLECT RADAR SIGNALS

FIELD OF INVENTION

5 The present invention is directed to improvements in or relating to vehicles and structures, and is more particularly directed to methods for reducing the radar signature of structures by directing the radar reflections from structures away from specified directions.

BACKGROUND TO THE INVENTION

10 Air-borne and water-borne defence vessels are under constant threat of detection and possible attack from non-friendly artillery such as ground-based, sea-going or air-borne weapons systems. Vessel detection is usually by means of radar, since conventional vessels, to a greater or lesser extent, all possess a radar signature.

 Radar operates by transmitting a pulse of electromagnetic energy and measuring the time between the transmitted pulse and the receipt of the reflection of the pulse from a target.
15 The range at which a target can be detected is a function of, amongst other things, the intensity of the pulse energy and the size of the target (also known as radar cross-section) with respect to the frequency of operation of the radar. In its simplest form, the best return of the electromagnetic pulse to the radar is generated when the surface reflecting the pulse is normal to the direction from which the pulse is transmitted. In this example, the strength of the
20 return signal is proportional to the square of the area of the surface and the square of the radar frequency.

 A number of proposals have been put forward with a view to reducing the radar signature of such vessels. In general these proposals involve purpose-building the vessel with radar cross-section reduction capability. This involves, in the case of a water-borne craft,
25 shaping the hull and other components of the craft. One such design is the so-called "stealthy" vehicle. These vehicles are designed so that the shape reflects radar energy away from the threat sectors into more benign areas.

 For example, an F117 bomber's threat region is forward and below the aircraft. Hence design is such that energy from a radar signal is reflected upwards and sideways from
30 its angled surface facets. Stealth ships require protection from sea-skimming missiles which normally approach parallel with the sea surface. Such a ship therefore has sloping sides which reflect the radar energy upwards and away from the threat direction. A sharply defined or specularly reflected beam emerges, as opposed to a diffuse reflection.

 It will be appreciated that vessels incorporating such designs involve significant
35 expense over and above the basic vessel. With tightening of government spending generally and defence budgets specifically, the prospect of replacing an ageing fleet with a new fleet

which incorporates an expensive design, even if the design may reduce the likelihood of loss of the vessel when on a war footing, is not an attractive proposition.

For vehicles that are not designed as "stealthy", the usual method of treatment to reduce radar cross-section is to cover the vehicle with a radar absorbent material. These materials are usually electrical attenuators such as carbon granules embedded in a membrane that is then fastened to the vehicle. This material works by attenuating the signal as the pulse energy passes through it towards the reflecting surface, and then again after reflection so that the resulting return signal is reduced. These methods rely on attenuating the radar beam. Radar absorbent materials of this type are expensive to purchase and install, and create major maintenance problems by trapping moisture and dirt and promoting corrosion of the substrate such as the ship super structure. Other proposals for radar absorbency have included the use of absorbent rubber sheets and paints.

SUMMARY OF INVENTION

The present invention accordingly provides in one embodiment a method for retrofitting a vessel to reduce its radar signature, the method including the step of attaching to surfaces of the vessel structure an array comprising a plurality of elements, the elements having reflective surfaces with substantially planar faces, the arrangement being such that when attached to surfaces of the vessel structure the faces are oriented so as to reflect an incident radar signal in a direction away from its direction of incidence for a given range of incident directions.

The present invention provides in another separate embodiment an array when used for retrofitting to a vessel to reduce its radar signature, the array capable of being fastened to surfaces of the vessel structure and comprising a plurality of elements, the elements having reflective surfaces with substantially planar faces, the arrangement being such that when the array is fastened to the vessel structure the faces are oriented so as to reflect an incident radar signal in a direction away from its direction of incidence for a given range of incident directions.

The present invention provides in another separate embodiment a vessel having surfaces of its structure retrofitted with an array according to the invention.

The orientation of the faces is preferably such that the faces are oblique to the direction of incident radar for a given range of incident directions. Preferably any edges defining the boundary of the reflective surfaces are also oriented so as to be oblique to the direction of incident radar. In this embodiment of the invention, with a surface orientation that is oblique to the direction of incident radar, the strength of the return signal is then only

proportional to the square of the length of the edge of the surface normal to the incident radar. If the face is oblique to the direction of incident radar, and the edges of the surface are oblique to the direction of incident radar, then only the corners of the surface will reflect as point sources. As points have no spatial dimension, the strength of the return signal from each point will vary inversely with the square of the radar frequency. In this way the radar cross-section of the vessel, and hence its radar signature, can be reduced for a given range of incident radar directions.

The present invention is capable of providing a degree of control over the direction in which electromagnetic waves are redirected, permitting other directions as well as the incident direction to be avoided where required.

A vessel according to the invention is any ship or vehicle requiring defence against radar threat. A vessel structure according to the invention includes any surface on the vessel capable of reflecting a radar signal. The structure will therefore, in the case of a water-borne craft, include the hull, bulkhead, decking, the bridge, any weapons or weapon turrets, and rigging.

In the case of a water-borne craft, incident radar is generally parallel to the sea surface, although naturally in some cases incident radar will emanate from aircraft. In accordance with the invention the reflective surfaces are preferably oriented so as to reflect an incident radar signal by up to about 30 degrees. More preferably the reflective surfaces are oriented so as to reflect an incident radar signal by up to about 15 degrees and more typically by up to about 8 to 10 degrees away from its direction of incidence for a given range of incident directions.

A surface to which an array according to the invention is attached will include substantially vertical surfaces, substantially horizontal surfaces, surfaces disposed at an angle to the vertical, and curved surfaces.

An element according to the invention may take any suitable form. The element will typically be triangular, polyhedral, pyramidal or prismatic in shape or in cross-section. The element may be an elongated triangle, polyhedron or pyramid. The element may be open-sided. It may be a solid figure. Where an element according to the invention defines an apex, the apex will typically be disposed in a region which is forward (colinear with respect to the incident radar signal) relative to the planar faces of the reflective surfaces.

An array according to the invention may take any suitable form. It may be uniform or non-uniform. If uniform, the array may comprise a grid of uniformly spaced elements having reflective surfaces with substantially planar faces. If non-uniform, the array may comprise a

plurality of randomly arranged elements having reflective surfaces. The elements may be uniform or non-uniform in shape or cross-section as required.

The arrangement of elements and/or the manner of installation of the array on a vessel structure is preferably such that the facets of the elements reflect the incident radar signal away from the threat direction. The arrangement is also preferably such that the facets of the array do not provide to any appreciable extent internal reflection sources whereby to reduce the likelihood of an incident radar signal being reflected towards an adjacent element in the array and in turn reflected back in the direction of the incident radar signal.

The array arrangements may be such that planar faces of the reflective surfaces of the elements are not all arranged in parallel planes.

An array according to the invention is preferably formed from a lightweight material so as to not substantially increase the overall weight of the vessel. The array may be in the form of a cladding. The elements may include perforations for the purpose of reducing its overall weight. If a perforated element is used, the holes are small relative to the wavelength of the incident radar signal to enable the elements to function as a solid reflector. The size and distribution of the perforations will therefore be dependant on the wavelength of the defined threat. The perforations may comprise elements according to the invention. A typical lightweight and relatively inexpensive material suitable for use in retrofitting methods according to the invention comprises aluminium. The aluminium may comprise a foil. The elements may in an alternative embodiment be formed from a mesh, such as a woven mesh. The mesh will be suitably treated so as to present substantially planar faces. Treatment could include encapsulation within a non metallic structure such as a fibre reinforced resin bonded composite material or between two sheets of glass where light or vision is required. Other materials such as bronze, stainless steel and copper may be used for forming an array according to the invention and are envisaged with the scope of the present invention.

The array may be provided in roll form capable of being cut to facilitate ease of attachment of the array to the vessel. It may be provided in sheet form. The sheet may include stiffening to enhance its rigidity or resilience. The sheet may be elongated. In one embodiment the array comprises a plurality of elongated sheets. The sheets may be joined together in any suitable manner. In another embodiment the array comprises a plate or plurality of plates. The plates may be joined together in any suitable manner.

An element may be formed on or in the array by pressing, impressing, stamping, casting, extrusion or by other suitable means to create the desired substantially planar face for a reflective surface of the array.

The element is preferably of relatively small thickness. A typical element thickness is
5 in the range of from about 0.25mm to 15mm more preferably in the range of from about 1mm to 6mm.

An array according to the invention may be attached to the vessel structure in any suitable manner. The array may be screwed, welded or otherwise fastened to the structure. If
10 welded, the array may be stud welded to the structure and secured by means of screws. The screws may be concealed from a given range of incident directions. Other attachment arrangements are envisaged within the scope of the invention.

The array may be releasably attachable to the vessel. This may facilitate ease of maintenance of the vessel structure and/or replacement or modification of the characteristics
15 of the array.

The present invention provides in another separate embodiment a method for retrofitting a building structure to reduce its radar signature, the method including the step of
20 attaching to surfaces of the building structure an array comprising a plurality of elements, the elements having reflective surfaces with substantially planar faces, the arrangement being such that when attached to surfaces of the structure the faces are oriented so as to reflect an incident radar signal in a direction away from its direction of incidence for a given range of incident directions.

The present invention provides in another separate embodiment an array when used for retrofitting a building to reduce its radar signature, the array adapted to be fastened to
25 surfaces of the building and comprising a plurality of elements, the elements having reflective surfaces with substantially planar faces, the arrangement being such that when the array is fastened to the building the faces are oriented so as to reflect an incident radar signal in a direction from its direction of incidence for a given range of incident directions.

The present invention provides in another separate embodiment a building having surfaces retrofitted with an array according to the invention.

30 A building according to the present invention may include a permanent or temporary structure.

The present invention provides in one particularly preferred embodiment a method for retrofitting a vessel to reduce its radar signature, the method including the step of fastening to surfaces of the vessel structure in elongated sheet form an array comprising a

plurality of uniformly shaped elements being triangular, polyhedral, pyramidal or prismatic in shape and having reflective surfaces with substantially planar faces, the orientation of the faces and edges defining the boundary of the reflective surfaces being such that the faces and the edges are oblique to the direction of incident radar for a given range of incident directions, the arrangement being such that when fastened to surfaces of the vessel structure the reflective surfaces are oriented so as to reflect an incident radar signal by up to about 30 degrees away from its direction of incidence for a given range of incident directions.

The present invention provides in another particularly preferred embodiment an array when used for retrofitting a vessel to reduce its radar signature, the array adapted to be fastened to surfaces of the vessel structure and comprising a plurality of uniformly shaped elements being triangular, polyhedral, pyramidal or prismatic in shape and having reflective surfaces with substantially planar faces, the orientation of the faces and edges defining the boundary of the reflective surfaces being such that the faces and the edges are oblique to the direction of incident radar for a given range of incident directions, the arrangement being such that when the array is fastened to surfaces of the vessel structure the reflective surfaces are oriented so as to reflect an incident radar signal by up to about 30 degrees away from its direction of incidence for a given range of incident directions.

DESCRIPTION OF PREFERRED EMBODIMENT

The present invention will now be described with reference to particularly preferred embodiments, in which:

Figure 1 is a schematic of the reflection pattern of a vessel without an array according to the invention;

Figure 2 is a schematic of the reflection profile of the bulkhead of a vessel structure to which one element of an array according to the invention is attached; and

Figure 3 is a cut-away perspective view of a side of a vessel to which an array according to the invention has been attached.

Turning to the drawings, Figure 1 shows a vertical surface 14a comprising, symbolically, a bulkhead of a vessel structure. In this arrangement a substantially horizontal incident radar signal (designated in Figure 1 as "pulse energy") striking vertical surface 14a (being normal to the incident radar signal) is reflected from the vertical surface 14a directly back to the radar source (not shown). It will be appreciated that a consequence of this arrangement is that the surface by virtue of its cross-section produces an easily discernible radar signature.

Figure 2 shows symbolically a bulkhead 14b to which an array 10 has been attached. Array 10 comprises a plurality of elements (of which for convenience only one typical example designated 15 is shown in cross-section in this embodiment). The element 15 shown is triangular in cross-section and comprises reflective surfaces having substantially planar faces 11, 12 and a leading edge 13. It can be seen from this embodiment that the planar faces are oriented so as to be oblique to the horizontal direction of the incident radar (also designated in Figure 2 as "pulse energy"). Although not clearly shown in Figure 2, edge 13 can also be oriented so as to be oblique to the horizontal direction of the incident radar.

Figure 3 shows part of an array 10 having a pair of elements 15 attached to the vertical surface of a bulkhead in the form of a ship's side 14b by concealed fastenings (that is, concealed from a given range of incident directions) in the form of screws 17.

Accordingly an incident radar signal 20 in a horizontal direction will be reflected in a direction 21 away from its direction of incidence on striking a planar face 11 or 12 of element 15. The angle of incidence of a reflected signal striking another part of the vessel structure, or the sea or ship deck 16 in the case of a water-borne craft will correspondingly be the same. The angle of reflection of the incident radar signal is preferably up to about 30 degrees away from the direction of the incident radar signal as shown in Figure 2. By contrast, the untreated upper vertical surface of the ship's side 14b will reflect incident radar signal 20a directly back in the direction of its direction of incidence as that surface is normal to the direction of the incident radar signal 20a.

It will accordingly be appreciated that an array arrangement comprising a plurality of elements 15 is such that when attached to surfaces of the vessel structure the reflective surfaces 11, 12 of the elements 15 are oriented so as to reflect an incident radar signal in a direction away from its direction of incidence for a given range of incident directions. There is also a degree of control over the direction in which the electromagnetic waves are redirected, permitting other directions as well as the incident direction to be avoided, where required. The array 10 is formed from substantially non-porous material. If a reflective mesh with holes is used, the mesh holes are small relative to the wavelength of the incident radar signal 20a to enable the elements 15 to function as a solid reflector.

In use, and with reference to Figures 2 and 3, an array 10 in elongated aluminium sheet form comprising a plurality of shaped elements 15 of triangular cross-section and having reflective surfaces with substantially planar faces 11, 12 stamped, embossed, cast or otherwise formed thereon or therein is fastened to a vessel structure by stud welding following by securing with concealed fastenings in the form of screws 17. The orientation of the reflective

surfaces and, if required, the edges 13 defining the boundary of the substantially planar faces 11, 12 is such that the reflective surfaces and the edges are oblique to the direction of incident radar for an incident horizontal directions, the arrangements being such that when fastened to surfaces of the vessel structure the reflective surfaces are orientated so as to reflect an incident radar signal by up to about 30 degrees away from the horizontal.

The present invention accordingly provides a cost-effective method for reducing the radar signature of an existing vessel and avoids the need to replace an existing vessel with an expensive purpose-built vessel.

The word 'comprising' and forms of the word 'comprising' as used in the description and in the claims does not limit the invention claimed to exclude any variants or additions.

Whilst it has been convenient to describe the present invention in relation to particularly preferred embodiments, it is to be appreciated that other constructions and arrangements are considered as falling within the scope of the invention. Various modifications, alterations, variations and/or additions to the constructions and arrangements described herein are also envisaged as falling within the scope of the present invention.

CLAIMS

1. An array for retrofitting to a vessel to reduce its radar signature, the array capable of being fastened to surfaces of the vessel structure and comprising a plurality of elements having reflective surfaces with substantially planar faces, wherein when the array is fastened to the vessel structure the faces are oriented so as to reflect an incident radar signal in a direction away from its direction of incidence for a given range of incident directions.
2. An array according to claim 1 wherein the orientation of the faces is such that the faces are arranged so as to be oblique to the direction of incident radar for a given range of incident directions.
3. An array according to either claim 1 or 2 wherein any edges defining the boundary of the reflective surfaces are oriented so as to be oblique to the direction of incident radar for a given range of incident directions.
4. An array according to any one of claims 1 to 3 wherein the reflective surfaces are oriented so as to reflect an incident radar signal by up to about 30 degrees.
5. An array according to any one of claims 1 to 3 wherein the reflective surfaces are oriented so as to reflect an incident radar signal by up to about 15 degrees.
6. An array according to any one of claims 1 to 5 wherein the reflective surfaces are oriented so as to reflect an incident radar signal by up to about 8 to 10 degrees.
7. An array according to any one of claims 1 to 6 wherein the element is triangular, polyhedral, pyramidal or prismatic in shape or in cross-section.
8. An array according to any one of claims 1 to 6 wherein the element is an elongated triangle, elongated polyhedron or elongated pyramid.
9. An array according to any one of claims 1 to 8 wherein the element defines an apex disposed in a region which is forward relative to the planar faces of the reflective surfaces and colinear with respect to the incident radar signal.
10. An array according to any one of claims 1 to 9 wherein the array comprises a plurality of uniform elements.
11. An array according to claim 10 comprising a grid of uniformly spaced elements having reflective surfaces with substantially planar faces.
12. An array according to any one of claims 1 to 11 formed from a lightweight material.
13. An array according to any one of claims 1 to 12 wherein the elements are perforated.
14. An array according to any one of claims 1 to 13, wherein the array is formed from a mesh material.

15. An array according to any one of claims 1 to 14, wherein said array is in roll or sheet form.
16. An array according to claim 15 wherein said sheet includes stiffening means to enhance the rigidity or resilience of said sheet.
- 5 17. An array according to any one of claims 1 to 15 wherein the elements have a thickness in the range of from about 0.25mm to 15mm.
18. An array of claim 17 wherein the element is of a thickness in the range of from about 1mm to 6mm.
19. A vessel having a structure to which is attached at least one array as claimed in any
10 preceding claim.
20. A method for retrofitting an array to a vessel to reduce its radar signature, the array being as claimed in any one of claims 1 to 18, the method including the step of attaching to surfaces of the vessel structure the array wherein the arrangement when attached to surfaces of the vessel structure results in the faces being oriented so as to reflect an incident radar
15 signal in a direction away from its direction of incidence for a given range of incident directions.
21. A method according to claim 20 wherein the array is fastened to the vessel structure by welding or by screw fastening the array to the structure.
22. A method according to claim 20 or 21, wherein the vessel structure comprises any
20 surface on the structure capable of reflecting a radar signal.
23. A method according to any one of claims 20 to 22, wherein the arrangement of elements on the vessel structure is such that the facets of the elements reflect the incident radar signal away from a threat direction.
24. A method according to any one of claims 20 to 23, wherein the array comprises a
25 plurality of sheets capable of being joined together.
25. A method for retrofitting an array to a vessel to reduce its radar signature, the array being as claimed in any one of claims 1 to 18, the method including the step of fastening to surfaces of the vessel structure in sheet form one or more arrays comprising a plurality of uniformly shaped elements being triangular, polyhedral, pyramidal or prismatic in shape and
30 having reflective surfaces with substantially planar faces, wherein the orientation of the faces and edges defining the boundary of the reflective surfaces being such that the faces and the edges are oblique to the direction of incident radar for a given range of incident directions, the arrangement being such that when fastened to surfaces of the vessel structure the reflective

surfaces are oriented so as to reflect an incident radar signal by up to about 30 degrees away from its direction of incidence for a given range of incident directions.

26. A vessel retrofitted according to the method of any one of claims 20 to 25.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 February 2001 (08.02.2001)

PCT

(10) International Publication Number
WO 01/09562 A1

(51) International Patent Classification⁷:
B63G 13/02

F41H 3/00,

(74) Agent: MCMASTER OBERIN ARTHUR ROBINSON
& HEDDERWICKS; Stock Exchange Centre, 530 Collins
Street, Melbourne, VIC 3000 (AU).

(21) International Application Number: PCT/AU00/00894

(22) International Filing Date: 26 July 2000 (26.07.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PQ 1894 28 July 1999 (28.07.1999) AU

(71) Applicant (for all designated States except US): TENIX
DEFENCE SYSTEMS PTY LTD [AU/AU]; Nelson
House, Nelson Place, Williamstown, VIC 3016 (AU).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:


— With international search report.

(72) Inventor; and

(75) Inventor/Applicant (for US only): STAFFORD, Philip,
K. [AU/AU]; 11 Tintern Mews, Cheltenham, VIC 3192
(AU).


For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: RETROFITTING VESSELS TO DEFLECT RADAR SIGNALS

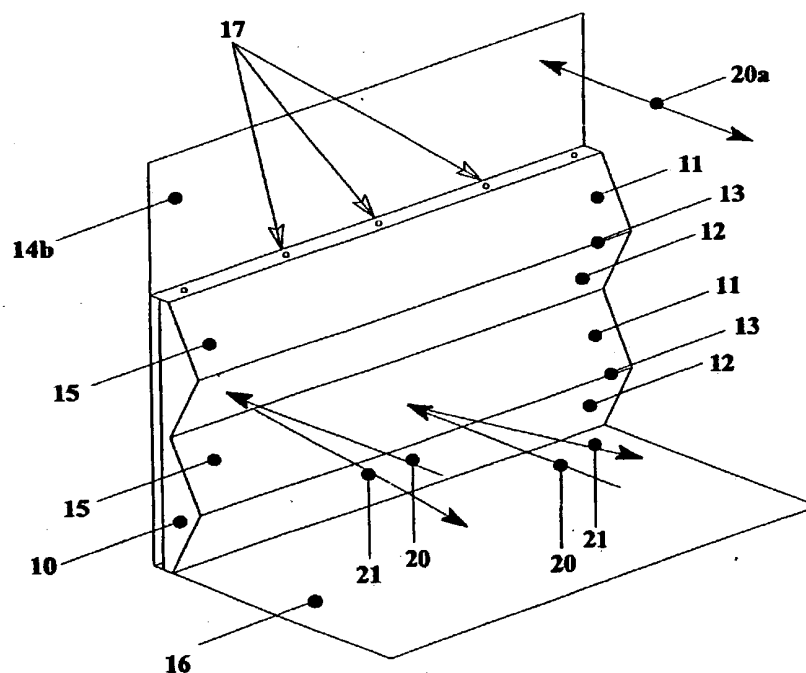

(57) Abstract: The radar signature of a vessel is reduced by retrofitting it with an array (10) of elements (15) fastened to surfaces (14b) of the vessel. The elements (15) have planar faces (11-12) so oriented that incident radar signal (20) is reflected away from its angle of incidence.

WO 01/09562 A1

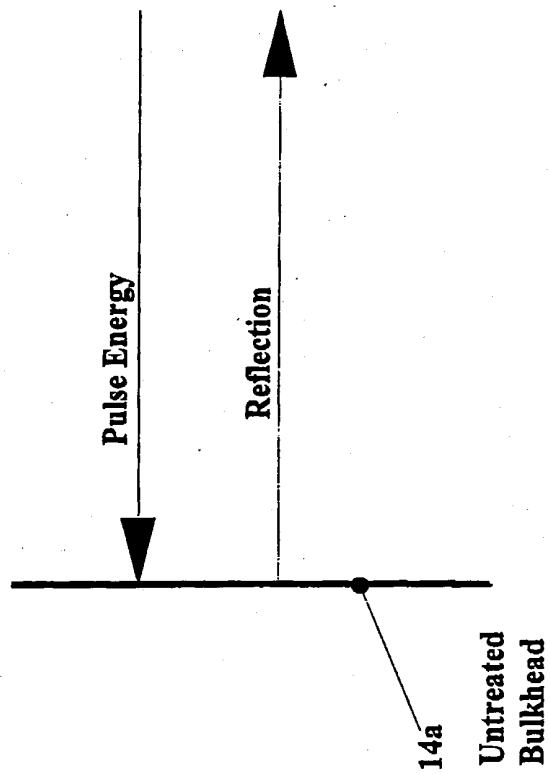

10/031934

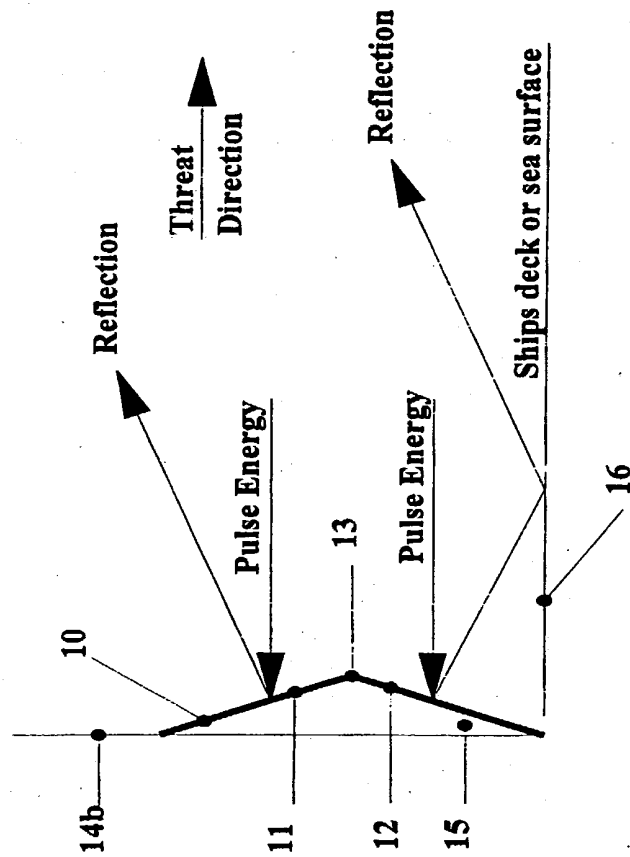


Figure 2

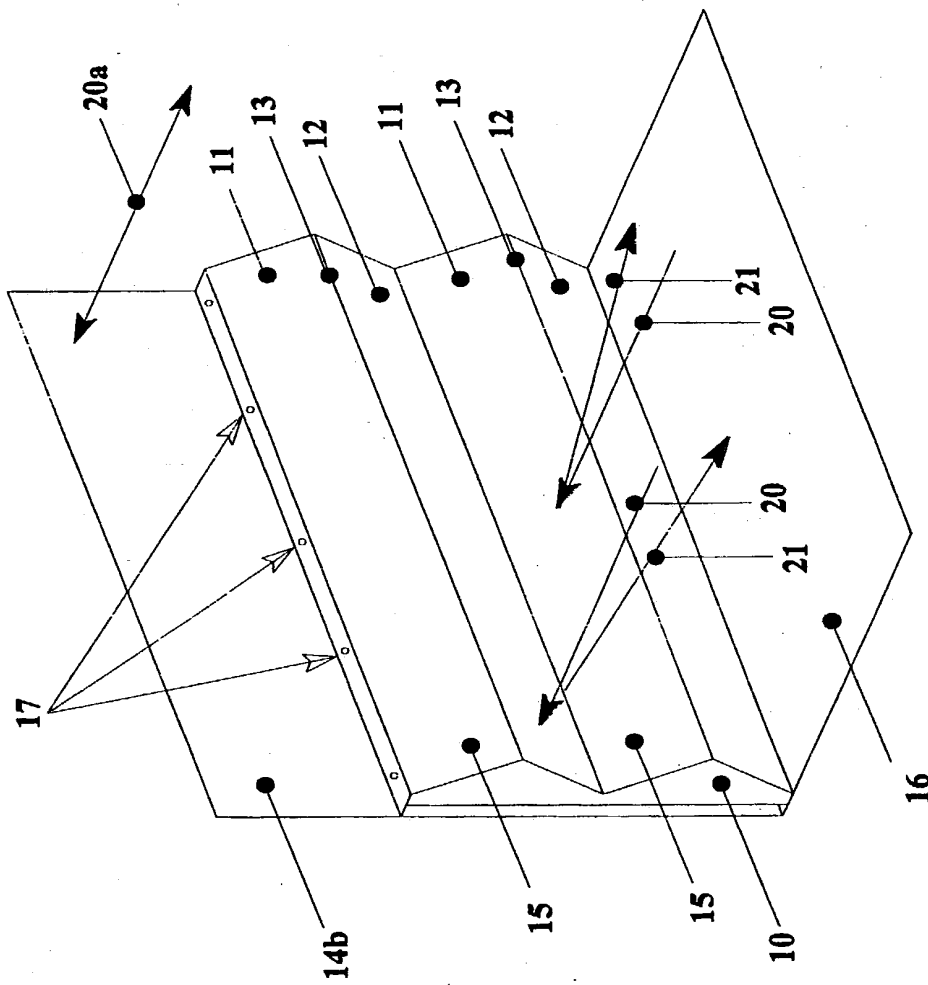


Figure 3

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I declare that:

My residence, post office address, and citizenship are as stated below next to my name. I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter that is claimed and for which a patent is sought on the invention entitled

RETROFITTING VESSELS TO DEFLECT RADAR SIGNALS

☐ the specification of which is attached hereto.
☒ was filed on July 26, 2000, as International patent application Serial No. PCT/AU00/000894

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information of which I am aware and which is material to the examination of the patent application in accordance with 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT International application which designates at least one country other than the United States, listed below and have also identified below, by checking the space, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is not claimed.

Prior Foreign Application(s)

| Number | Country | Day/Month/Year Filed | Priority Not Claimed |
|----------------|------------------|----------------------|----------------------|
| <u>PQ 1894</u> | <u>Australia</u> | <u>28/JULY/1999</u> | |

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below.

Application Serial Number

Filing Date

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s), or §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose information known to me which is material to the patentability as defined in 37 CFR §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Application Serial Number

Filing Date

Status (patented, pending, abandoned)

2

Each undersigned applicant hereby appoints **CONRAD J. CLARK (Registration No. 30,340)** and **CHRISTOPHER W. BRODY (Registration No. 33,613)**, as his attorneys with full power of substitution to prosecute the subject application and to transact all business in the Patent and Trademark Office connected therewith.

Send Correspondence to: **CLARK & BRODY, 1750 K Street, NW, Suite 600, Washington, DC 20006; Telephone: 202-835-1111; Facsimile: 202-835-1755.**

I hereby declare that all statements made herein of my own knowledge are true and that all statement made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: Philip K. StaffordInventor's signature: [Signature]Date: 6/5/2002Residence: Cheltenham, AustraliaCitizenship: AustraliaPost Office Address: 11 Tintern Mews, Cheltenham VIC 3192 Australia

Full name of second joint inventor, if any: _____

Inventor's signature: _____

Date: _____

Residence: _____

Citizenship: _____

Post Office Address: _____

Full name of third joint inventor, if any: _____

Inventor's signature: _____

Date: _____

Residence: _____

Citizenship: _____

Post Office Address: _____